

Wardrobe with drawer is supplied with the following part :



Top
1 pc



Base
1 pc



Door
2 pcs



Sides panel
2 pcs



Back panel
1 pc




Top shelf
1 pc




Bottom shelf
1 pc



Hanging
1 pc

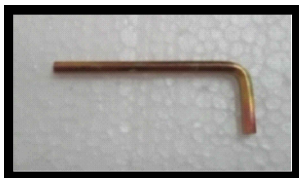

Allen Key
1 pc

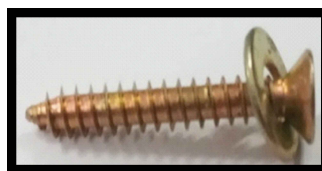

Screw 1" with washer
18 pcs



Hand Drill
Supplied By Customer



Shelf pen
4 pcs



Legs
4 pcs



Bolt 20mm
16 pcs



Bolt 30mm
4 pcs



Bolt 40mm
4 pcs




Screw Driver
Supplied By Customer



Anti-tip
1 set

Step 1

Position the drawer chest sideways. Then Install legs to drawer chest matching the number using 20mm bolt.


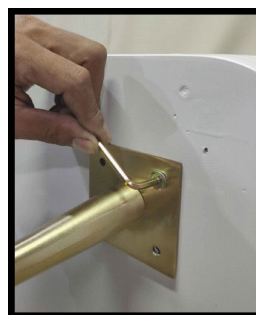


Assembly Instructions

Lily Wardrobe with drawer



Step 2

Install left & right panel to the base with 40mm bolt. Then Install bottom shelf to inside of the wardrobe.

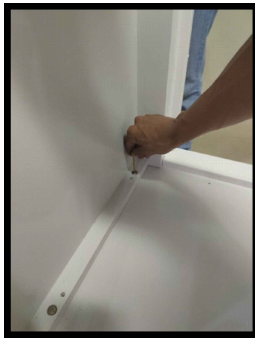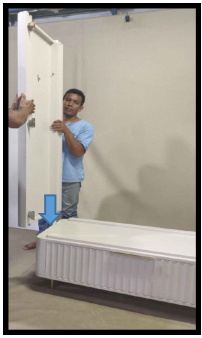


Step 3

Install back panel to body with 1" screw + washer.

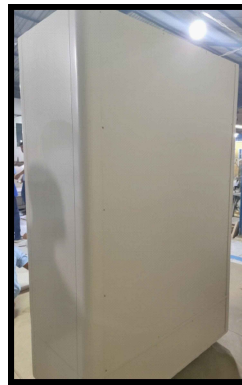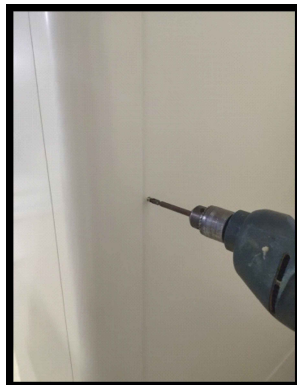




Step 4

Install the top profile to the wardrobe with 30mm bolt.

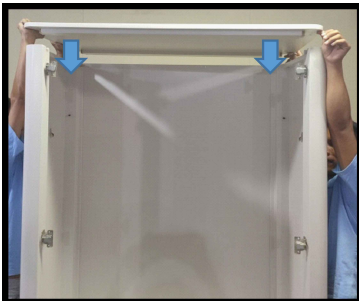




Step 5

Install the door to the side panel or body.

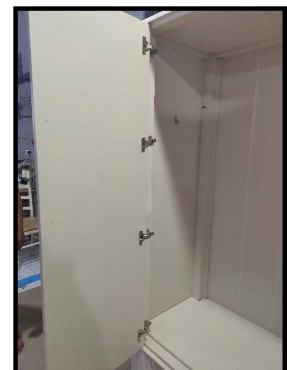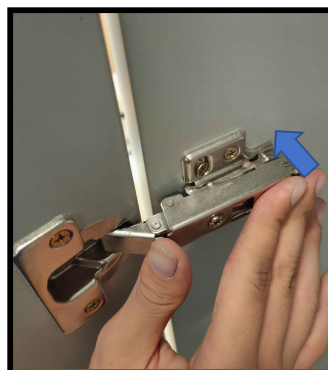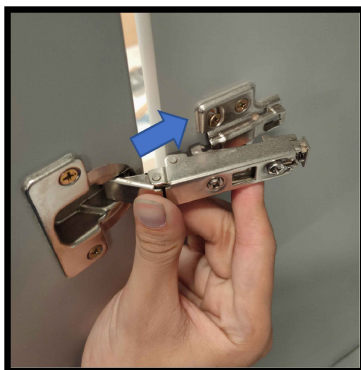

Step 6

Install shelf pen, top shelf and hanging rod to inside of the wardrobe.

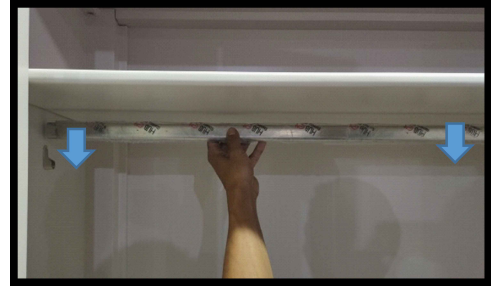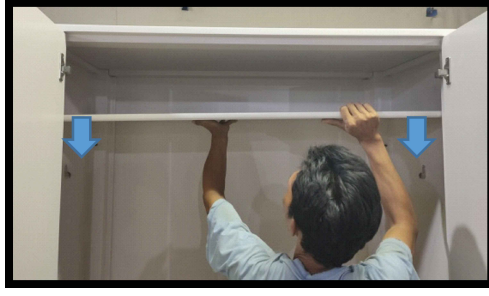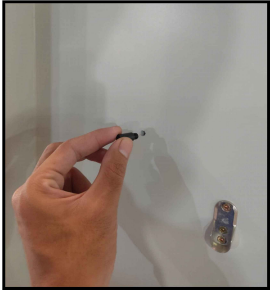

Anti-tip kit instructions :


FOR SAFETY WE RECOMMEND THE USE OF THE ANTI-TIP KIT PROVIDED.

- Before use, check your wall type & ensure that the wall plug provided is suitable.
If it is not, you must source one that is correct for your wall type.
If you are unsure, please seek advise from a professional tradesperson.

BEFORE STARTING, ALWAYS CHECK THAT THE WALL IS FREE FROM ELECTRICAL CABLES, WATER OR HEATING PIPES.

- Install anti-tip to the top panel with screw follow pre-drill arrow.
- For the drill point, the middle of the Wardrobe is 512,5 mm with a height of 1970 mm from the Floor.
- Drill into the wall and insert the correct wall plug.
- Line your unit up with the wall.
- Screw the wall fixing fully into the wall and ensure it is secure.


Carefully move the unit back into position and attach the strap to the bracket using the clip.

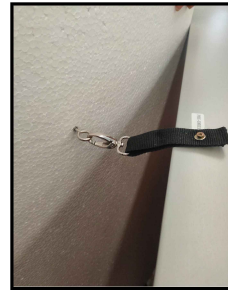

On top of Wardrobe



Fully Assembled

Wardrobe with drawer ready to use

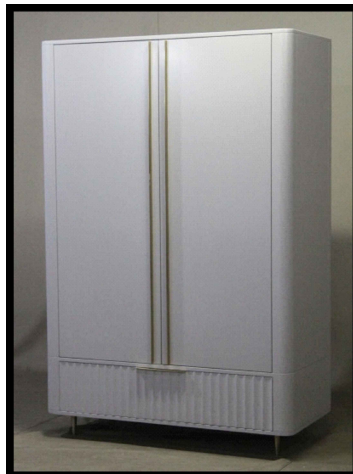



Door Adjustment

1. Side Adjustment



A special adjusting facility allows the door to be adjusted laterally, whereas the minimum distance of 0.7 mm remains unchanged. The adjusting screw produces the lateral travel of the hinge arm from -1.5mm up to +4.5 mm, This value is reduced to -0.5 mm with profile door hinges and mini hinges. The door moves laterally away from the side panel. Re-adjustment is not required.



2. Depth Adjustment

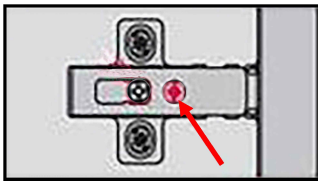

Depth adjustment

The depth of the door can be adjusted from -0.5 mm to +2.8 mm via eccentric using Duomatic mounting plates with quick fixing system. It is not necessary to loosen other screws.

3. Height Adjustment

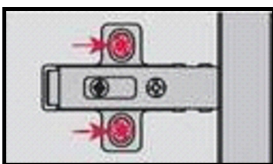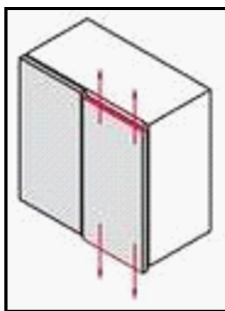

Height adjustment

The height of the door can be adjusted by ± 2 mm by loosening the two fixing screws.

The slots allow the mounting plate to glide in both directions. The screws must be retightened after adjustment.